

Chairman™


Seating Capacity.....	6 Adults
Dimensions	92" x 92" x 36", (234 cm x 234 cm x 91 cm)
Corner Radius	16" (41 cm)
Dry Weight.....	920 lbs (418 kg)
Filled Weight (Average Fill)	4,260 lbs (1,933 kg)
Water Capacity (Average Fill).....	400 US gallons (1,514 Liters)
Shipping Weight	920 lbs (418 kg)
Export Shipping Weight:	970 lbs (440 kg)
Electronic Controls	D1 SmartHUB™ full color glass touch control panel; access to control jets, temperature, settings and maintenance schedule
Pump 1.....	North America (60 Hz): 2-Speed, 4.0 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):.....	1-Speed, 2.0 HP continuous
Pump 2.....	North America (60 Hz): 1-Speed, 3.6 HP break, 2.5 HP continuous, 48 Frame
Export (50 Hz):.....	1-Speed, 2.0 HP continuous
Circulation Pump.....	Yes
Fountain Pump	Yes
Filtration (factory default)	24/7 Filtration (Purge Cycles 2 x 10 minutes)
Total VCR Jets	48
Seat 1 UltraLounge Jets.....	1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 2 Mini Storm Rotator, 4 Power Storm Directional, 2 Mini Storm Directional, 4 Power Storm Dual Rotator
Seat 2 Jets.....	1 Power Storm Rotator
Seat 3 Jets.....	1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 1 Power Storm Rotator, 7 Mini Storm Rotator
Seat 4 Jets.....	4 Mini Storm Directional
Seat 5 Max Therapy Seat Jets	1 Pillow Mini Storm Rotator, 2 Pillow Cluster Shower Directional, 4 Power Storm Directional, 8 Mini Storm Rotator (6 on sidewalls)
Seat 6 Jets.....	1 Power Storm Multi Port
Footwell (7).....	1 Typhoon
Massage Selectors	2
Special Features	Tactile Therapy, Spa Status Light, 3 Flex Therapy Pillow™, UltraLounge™, Max Therapy Seat, Dynamic Massage Sequencer™, Aux Control
Water Management System.....	UltraPure™ Plus System; Two 75 ft filter cartridge; 8" Weir
LED Lighting	Liquid FX™
Optional	Exterior Lights
Siena™ Cabinet Colors.....	Ashwood, Chestnut, Sandalwood
Acrylic Colors	Moonstone, UltraLife, Sunstone, Smoked Marble, UltraLife Gray, Desert Stone
Headrests	3 Flex Therapy Pillow™
Water Feature.....	Fountain with independent flow rate (on or off) adjustment; powered by the fountain pump
Heater	2.1, 3.4, 5.5 kW
Export (50Hz).....	2.1, 3.4, 5.5 kW
Electrical Requirements:	North America (60 Hz): 240 VAC@30A, 40A or 50A Export (50 Hz): 230 VAC@1x16A, 1x32A, 2x16A, 3x16A or suitably rated circuit breaker to comply with local electrical codes. Certain countries may require dual power inputs
Warranty*.....	North America (60 Hz): Lifetime for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 7 Years for Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo; Export (50 Hz): 10 Years for UltraLife Shell Surface, 7 Years Acrylic Shell Surface, 5 Years Plumbing, 5 Years Equipment and Controls, 2 Years for Cabinet, 1 Year Water Purification System, 2 Years for Jet Insert, 1 Year for Jet Escutcheon, 2 Years Lights, 1 Year Stereo
Audio System (Optional).....	Fully Integrated Stereo System with Bluetooth capability, 4 premium speakers and a subwoofer
Optional.....	SmartTub®



*(See Warranty Document for Specific Details)

Chairman

Massage Selector Diagram

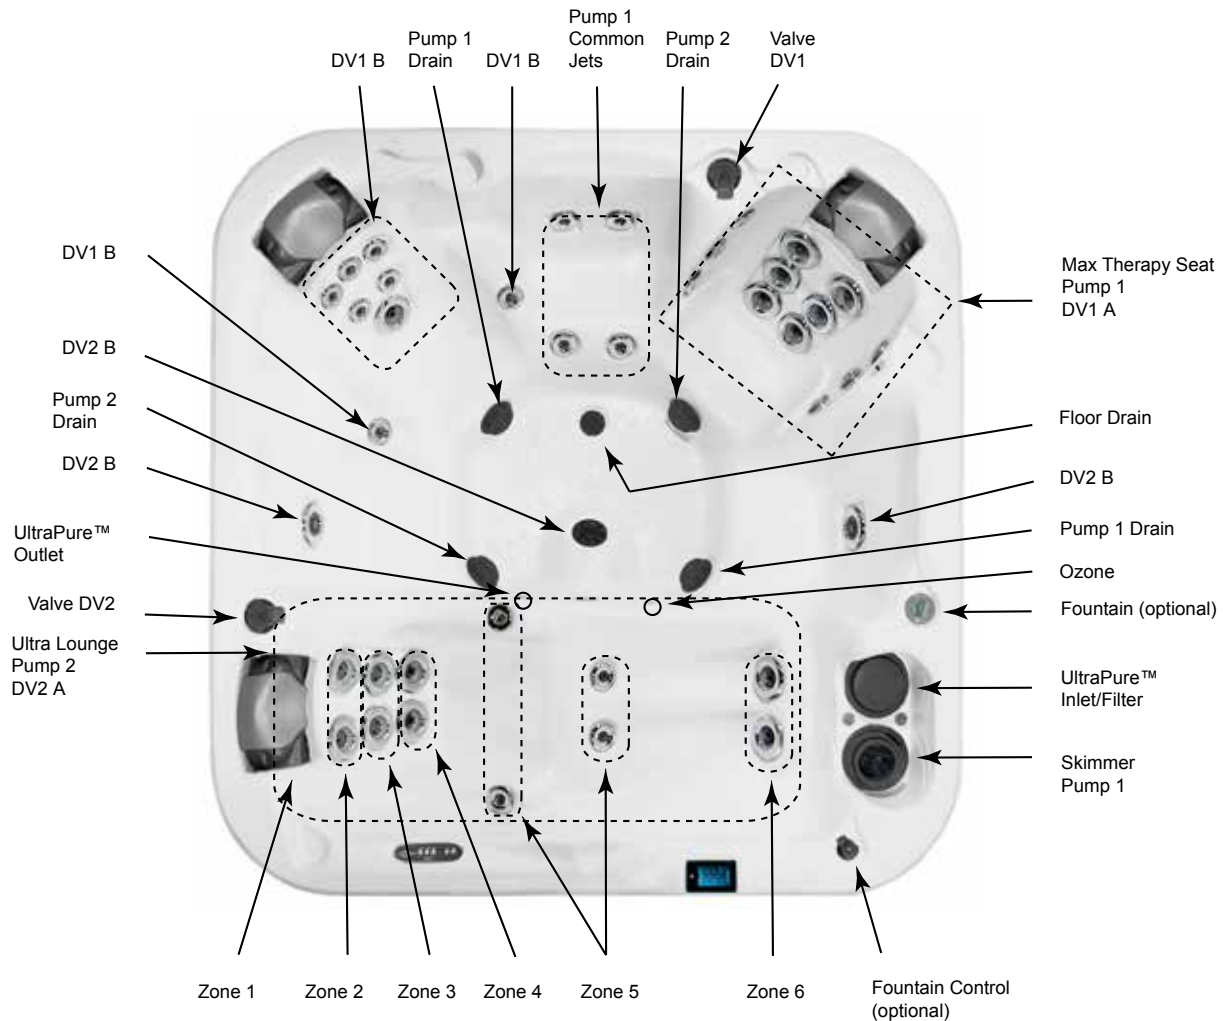

DV1 A = Diverter Valve 1 (A position Clockwise)
 DV1 B = Diverter Valve 1 (B Position Counter Clockwise)
 DV1 C = Diverter Valve 1 (Neutral Position)
 DV2 A = Diverter Valve 2 (A position Clockwise)
 DV2 B = Diverter Valve 2 (B position Counter Clockwise)

Spa Operation Subject to Change without Notice

Seat Depths

1 = 25.00" (63.50 cm)
 2 = 27.00" (68.58 cm)
 3 = 28.00" (71.12 cm)
 4 = 21.00" (53.34 cm)
 5 = 30.00" (76.20 cm)
 6 = 26.00" (66.04 cm)

7 = 32.00" (81.28 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**



Dimensions/Specifications are Subject to Change Without Notice


Chairman

Jet Designation

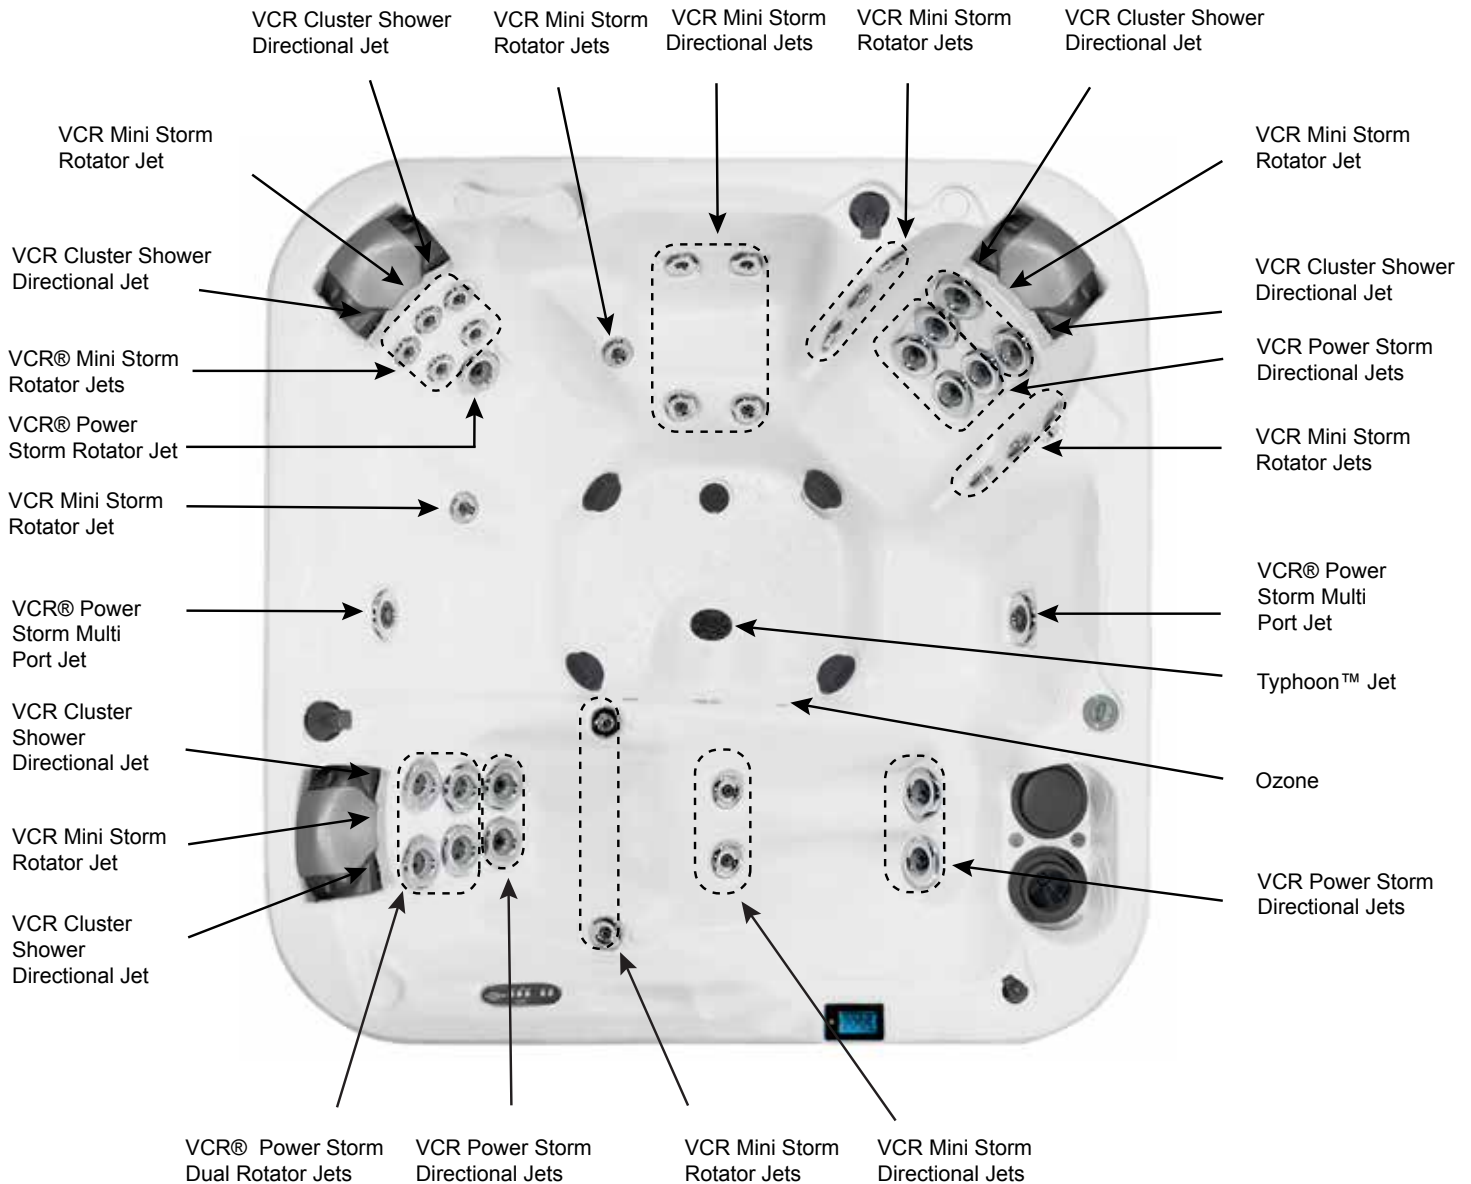


Dimensions/Operation/Specifications are Subject to Change Without Notice

48 Total Jets

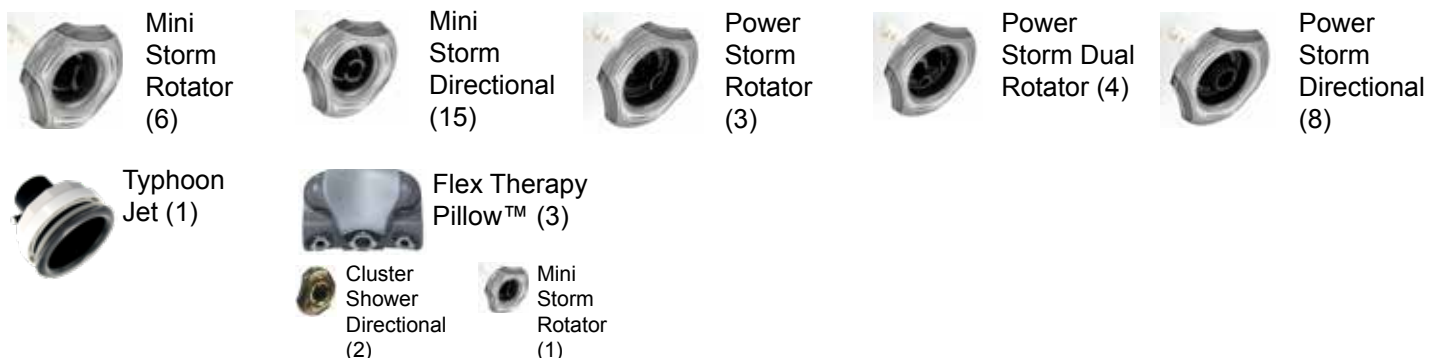


Chairman

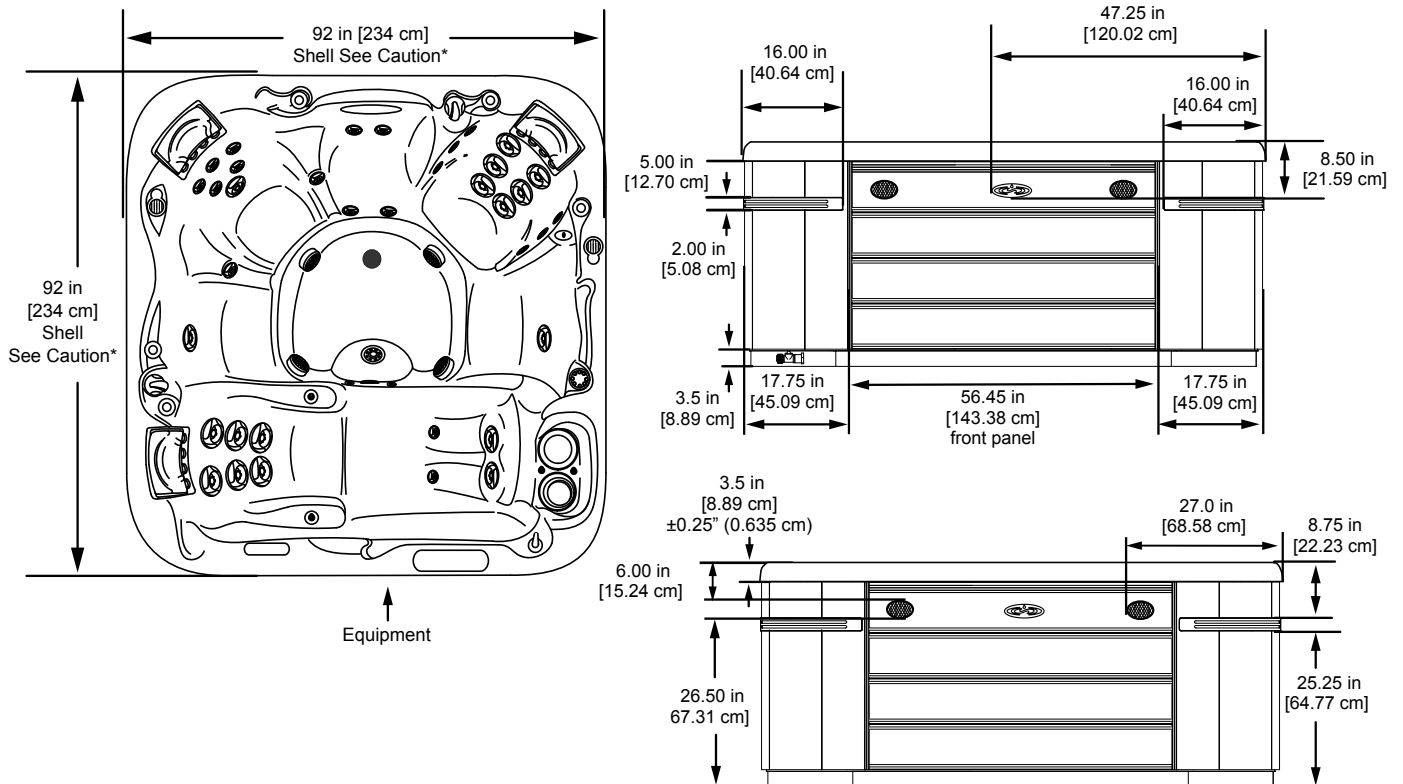

*Caution:

Due to manufacturing tolerances there could be some minor differences between the actual spa and the drawing above. **If site planning is critical to such tolerances, be sure to measure your actual spa.**

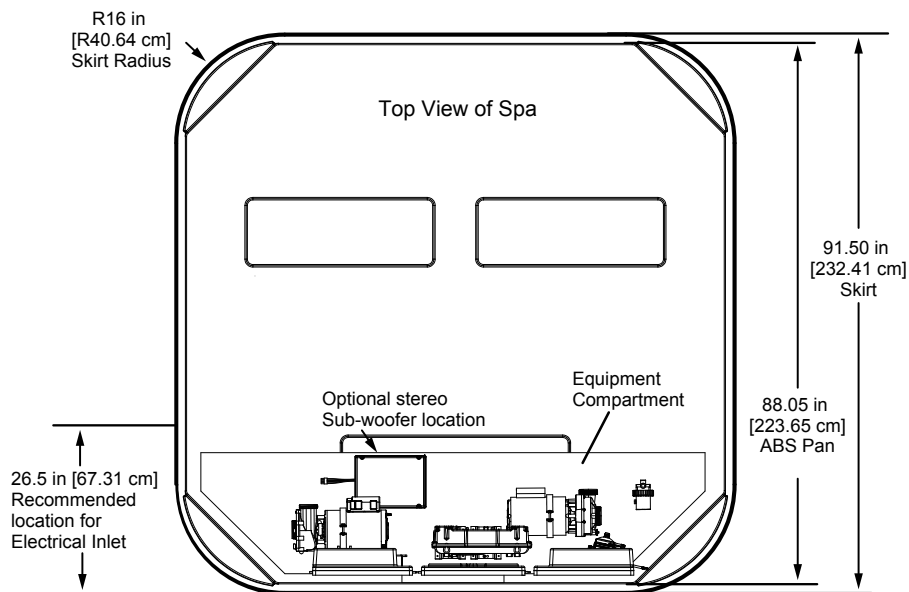

- Note:
1. Subject to change without notice.
 2. Engineering specs may differ slightly from brochure.
 3. For lifter installation allow 18" (45.7cm) clearances on the backside of the spa.
 4. Alternative cabinets may add significant weight. Ask your dealer for exact details.
- Dimensions/Specifications are Subject to Change Without Notice (Tolerance $\pm 0.5"$ [1.27 cm]).